


N-C Noise-COM – professional radio headset compatible with hearing protectors



The Savox N-C noise com is a smart and flexible communication solution for high-noise environments. The N-C unit mounts into earmuff type hearing protectors and turns them into a communication headset.

Designed for following uses and industries

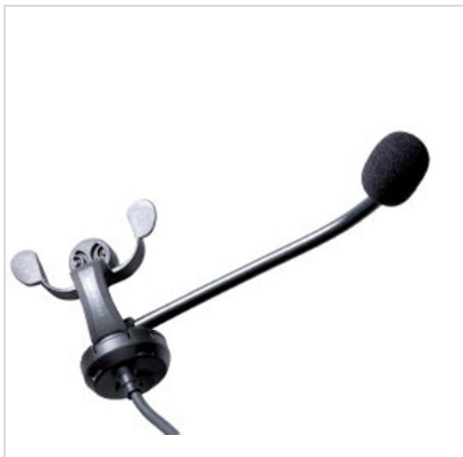

TECHNICAL DATA	
WEIGHT	81g
SIZE	70 x 175mm
DIRECTIVITY	Noise-cancelling
MIC IMPEDANCE	2500 Ohm @ 1 khz
SPEAKER IMPEDANCE	32 Ohm @ 1khz (±15%)
CABLE, COILED (flame-retardant)	4mm dia, 270mm, PUR
CONNECTOR	4-pole quick-release connector or SAVOX® NC direct according to radio/phone
OPERATING TEMPERATURE	-25 to +63oC (continuous)
HUMIDITY	95% RH, +63oC for 500 hours

KEY BENEFITS

- Boom microphone
- For high-noise environments
- Fits all regular ear protectors thanks to an ingenious attachment system
- Quick-release connector
- No effect on hearing protection level
- Adapts to Savox com-control units